



BDM

110% self banded BAFFLED CUBE SERIES

- These Cubes comply with AS 1692 and AS 1940. In addition, designed and manufactured in accordance with UL standards
- The outer tank will hold 110% of the inner tank's capacity
- Multiple forklift pockets ensure ease of access and manoeuvrability, as well as lifting eyes to each corner
- Secure hose entry and exit ports
- Tank can feed and return from up to 3 generators at once
- Triple paint process
- All Cubes up to 5,000 litres are certified to be lifted full of product either the top 4 top lift points or the forklift pockets. The 6,000 litre to 10,000 litre Cubes certified to lift full from the forklift pockets only
- The standard Cube internal tank is not removable. But removable internal tank design is also available upon request
- The internal tank is coated in vegetable oil for corrosion resistance
- 4 x way forklift pockets
- Colour standard is white. However, can be painted in colours to suit - based on volume
- Fully lockable lid on gas struts
- Generator hose suction and return points
- Stackable - 3 high empty and 2 high when full
- Supplied with all required statutory decals

BDM Cube product range

Code	Gross Volume (L)	Safe fill level (L)	(LxWxH) mm	Tare weight kg
Cube 500L	500	450	1210 x 1020 x 840	350
Cube 1000L	1200	1080	1610 x 1020 x 1260	630
Cube 2000L	2220	2000	2710 x 1020 x 1260	1100
Cube 3000L	3340	3000	2090 x 1910 x 1260	1300
Cube 4000L	4150	3740	2330 x 2090 x 1260	1750
Cube 5000L	5220	4700	2870 x 2090 x 1260	1650
Cube 6000L	6667	6000	3585 x 2090 x 1260	1850
Cube 8000L	9000	8000	4740 x 2090 x 1260	2350
Cube 10000L	11110	10000	5850 x 2090 x 1260	2800

The standard fittings incorporated for all BDM Cubes include:



- ✓ 1 x 2 inch fill port with Camlock Male Tanker hose filler c/w Dust Cap connection
- ✓ 1 x 2 inch fill port with filter
- ✓ 3 x 1.5 inch suction port
- ✓ 2 x 1 inch suction port
- ✓ 2 x 1.5 inch return port
- ✓ 2 x Anodised dipstick, one for fuel dip, one for interstitial dip
- ✓ 1 x 2 inch interstitial vent
- ✓ 1 x air breather vents and fittings supplied complete with dust filter fitting
- ✓ 1 x set of statutory signage

BDM Cube tank in action



Innovative tank design



Typical inner tank configuration

Secure During Use - fuel hose access feature enables cabinet to be kept locked while supplying fuel




Lockable Hatch Lid - for fuel security

Spill Box - for inspection and maintenance access to the inner tank

Tie Down Points - easily secure tank in transit

Full Load Lifting Eyes - certified for lifting with tank full of fuel

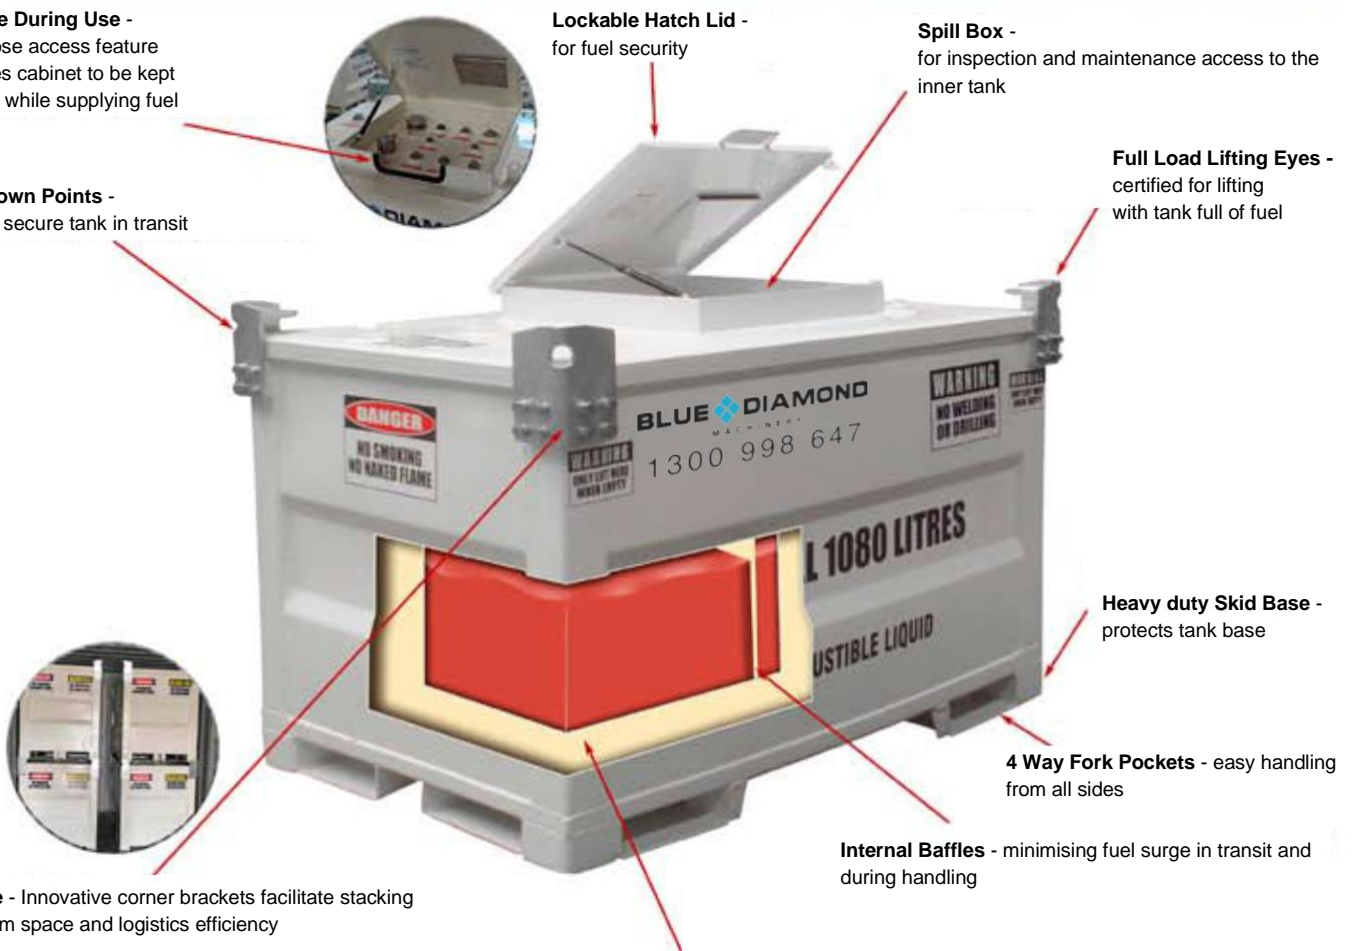

Stackable - Innovative corner brackets facilitate stacking for optimum space and logistics efficiency

Heavy duty Skid Base - protects tank base

4 Way Fork Pockets - easy handling from all sides

Internal Baffles - minimising fuel surge in transit and during handling

110% SECONDARY Containment - double wall construction provides maximum protection for the environment from leakage and fuel spills