



4KVA Portable Generator

Fuel Economy Mode - reduces fuel consumption

Cast iron sleeved engine for long durability with automatic low oil shutdown protection


Largest tank in the industry with extended run-time(less refueling) with integrated fuel gauge for convenience

Conveniently located multi-featured control panel with custom designed outlet cover protecting outlets from dirt, dust and debris

3 in 1 Data-Minder monitors running hours, voltage and frequency in conjunction

Bonus accessories including engine oil, oil funnel, tool kit and battery charge cable (optional)

3 years warranty*

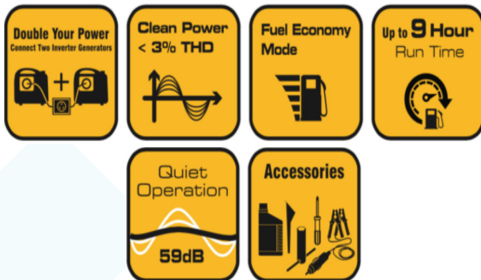

GEN3650iE		
GENERATOR	Rated AC Voltage	220V, 230V, 120V
	Rated AC Output	3000W
	Max. AC Output	3300W
	Alternator Type	Brushless, self exciting, synchronous, 2-pole
	Voltage Regulation	THD<3%
	Power Factor COS	1.0
	Phase	Single Phase
ENGINE	Engine Brand	GENESYS
	Engine Model	SIE 180
	Engine Type	4-stroke, single cylinder, air cooled, OHV
	Displacement	171 cc
	Max. Power Output	5.5HP
	Starting System	Recoil/Electric/Remote
	Fuel	Unleaded Petrol
GENSET	Fuel Tank Capacity	7.0L
	Running Time, one tankul @ 25% load	9.0h
	Dimensions(LxWxH)	675*480*490mm
	Dry Weight	40.8kg
	Inverter	Yes
USB and Parallel Operation	Yes	

*Limited to 500 hours & No Warranty on Battery

